

# NT1-A

The World's Quietest Studio Condenser Microphone

**AUSTRALIA**  
107 Carnarvon st, Silverwater NSW 2128 Australia  
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

**USA**  
PO Box 91028, Long Beach CA 90809-1028  
Ph: +1 562 364 7400 Fax: +1 888 412 4664



## Features


- Large 1" (25mm) capsule with gold plated diaphragm
- Cardioid polar pattern
- Self noise of only 5dB (A)
- Ultra low noise, transformerless surface mount circuitry
- Wide dynamic range
- Gold plated output contacts
- True condenser (externally biased)
- Internal capsule shock mounting
- Designed and manufactured in Australia
- Free 10 year extended warranty when you register online at [www.rodemic.com/warranty](http://www.rodemic.com/warranty)

## Specifications


Acoustic Principle	Pressure gradient
Directional Pattern	Cardioid
Frequency Range	20 Hz-20 kHz
Sensitivity	-32 dB re 1 Volt/Pascal (25 mV @ 94 dB SPL) +/- 2 dB @ 1kHz
Output Impedance	100Ω
Dimensions	Length - 190mm (7.480") Diameter - 50mm (1.968")
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)
Shipping Weight	780gm
Net Weight	326g

## Incl. Accessories


- SM6 Shock mount with integrated popshield
- 6m (20') high quality XLR cable
- Microphone dust cover
- NT1-A 'Studio Secrets' DVD

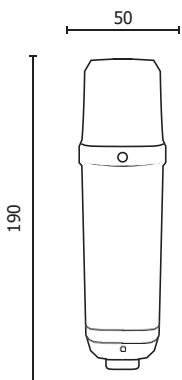

## Polar Pattern



## Frequency Response

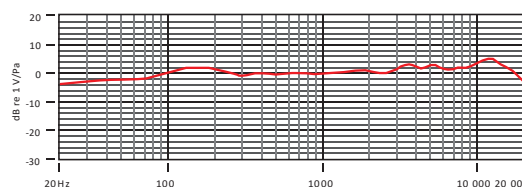

**RØDE**  
MICROPHONES

## 性能

- Large 1" (25mm) capsule with gold plated diaphragm
- Cardioid polar pattern
- Self noise of only 5dB (A)
- Ultra low noise, transformerless surface mount circuitry
- Wide dynamic range
- Gold plated output contacts
- True condenser (externally biased)
- Internal capsule shock mounting
- Designed and manufactured in Australia
- Free 10 year extended warranty when you register online at [www.rodemic.com/warranty](http://www.rodemic.com/warranty)

- 大型1英寸（25毫米）极头，镀金膜片

- 心形极性模式

- 自身噪音只有 5dB（A）。

- 超低噪音，无变压器表面贴装电路

- 广泛的动态范围

- 镀金的输出触点

- 真正的冷凝器（外部偏压）。

- 内部极头防震安装

- 在澳大利亚设计和制造

- 在网上注册[www.rodemic.com/warranty](http://www.rodemic.com/warranty)，可免费延长10年保修期

Acoustic Principle 声学原理	Pressure gradient 压力梯度
Directional Pattern 定向模式	Cardioid 心形
Frequency Range 频率范围	20 Hz-20 kHz
Sensitivity 灵敏度	-32 dB re 1 Volt/Pascal (25 mV @ 94 dB SPL) +/- 2 dB @ 1kHz
Output Impedance 输出阻抗	100Ω
Dimensions 尺寸（毫米）	Length - 190mm (7.480") Diameter - 50mm (1.968")
Output Connection 输出连接	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)
Shipping Weight 运输重量（克）	780gm
Net Weight 净重（克）	326g