


# NT1000

Ultra Versatile 1" Studio Condenser Microphone  
1" 录音棚电容话筒

**AUSTRALIA**  
107 Carnarvon st, Silverwater NSW 2128 Australia  
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

**USA**  
PO Box 91028, Long Beach CA 90809-1028  
Ph: +1 562 364 7400 Fax: +1 888 412 4664

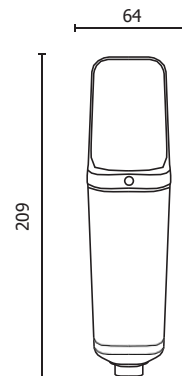

## Features


- HF2 1" capsule with gold-plated diaphragm
- Ultra low noise transformerless circuitry
- Cardioid polar pattern
- Durable satin nickelfinish
- High strength welded and heat-treated mesh head
- Internal capsule shock mounting
- True condenser (externally biased)
- Full frequency response
- Designed and manufactured in Australia
- Free 10 year extended warranty when you register online at [www.rodemic.com/warranty](http://www.rodemic.com/warranty)

## Specifications


Acoustic Principle	Pressure gradient
Directional Pattern	Cardioid
Frequency Range	20 Hz-20 kHz
Sensitivity	-36 dB re 1 Volt/Pascal (16 mV @ 94 dB SPL) +/- 2 dB @ 1kHz
Output Impedence	100Ω
Dimensions	Length - 209mm (8.2283") Diameter - 54mm (2.1259")
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)
Shipping Weight	980g
Net Weight	682g



## Polar Pattern



## Frequency Response

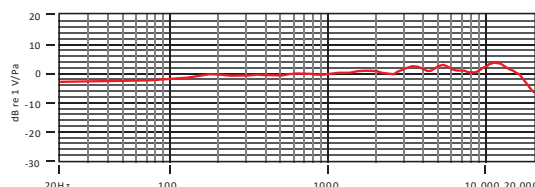

## Incl. Accessories

- ZP1 zippouch
- RM2 standmount

**RØDE**  
MICROPHONES



## Features 特点

- HF21" capsule with gold-plated diaphragm
- Ultra low noise transformer less circuitry
- Cardio polar pattern
- Durable satin nickel finish
- High strength welded and heat-treated mesh head
- Internal capsule shock mounting
- True condenser (externally biased)
- Full frequency response
- Designed and manufactured in Australia
- Free 10 year extended warranty when you register online at [www.rodemic.com/warranty](http://www.rodemic.com/warranty)

- 带镀金振膜的HF21"极头
- 超低噪音的无变压器电路
- 心形极性模式
- 持久耐用的缎面镍质表面
- 高强度焊接和热处理的网头
- 内部极头防震架
- 真正的电容器（外部偏压）
- 频率响应
- 在澳大利亚设计和制造
- 在网上注册[www.rodemic.com/warranty](http://www.rodemic.com/warranty)，可免费延长10年保修期

## Specifications 规格

Acoustic Principle 声学原理	Pressure gradient 压力梯度
Directional Pattern 方向性模式	Cardio 心型
Frequency Range 频率范围	20 Hz-20 kHz
Sensitivity 敏感度	-36 dB re 1 Volt/Pascal (16 mV @ 94 dB SPL) +/- 2 dB @ 1kHz
Output Impedence 输出阻抗	100Ω
Dimensions 尺寸（毫米）	Length 长度 - 209mm (8.2283") Diameter 直径 - 54mm (2.1259")
Output Connection 输出连接	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground) 3 针XLR与第2 针 (+)、第3 针 (-)，第1针 (地) 之间的平衡输出
Shipping Weight 运输重量（克）	980g
Net Weight 净重（克）	682g