


NT-USB

Versatile Studio-Quality USB Microphone
多功能录音棚质量级别的USB话筒

AUSTRALIA
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 91028, Long Beach CA 90809-1028
Ph: +1 562 364 7400 Fax: +1 888 412 4664

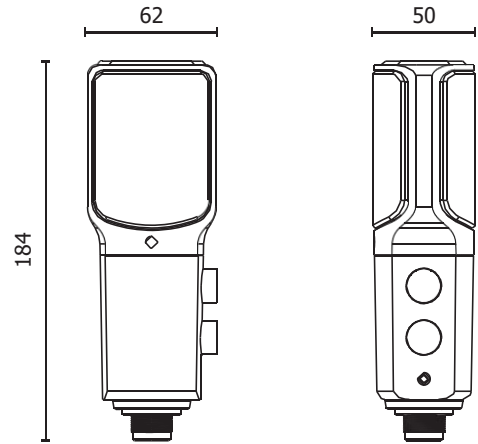


Features

- Popshield, Tripod deskstand, ringmount, storage pouch and 6m (20') USB cable included.
- 3.5mm stereo headphone jack for zero-latency monitoring
- Direct mix control between mic input and source output
- Compatible with Apple iPad
- Cardioid polar pattern
- Compatible with the SMR shockmount & WS2 foam windshield
- Free two year extended warranty*


Specifications

Acoustic Principle	Pressure Gradient
Active Electronics	JFET impedance converter with bipolar output buffer, A/D converter 16bit 48kHz, headphone amplifier
Directional Pattern	Cardioid
Frequency Range	20Hz ~20kHz
Dynamic Range	96dB
Maximum SPL	110 dB SPL
Power Requirements	USB 5vDC
Output Connection	USB
Net Weight	520g

Polar Pattern



Frequency Response

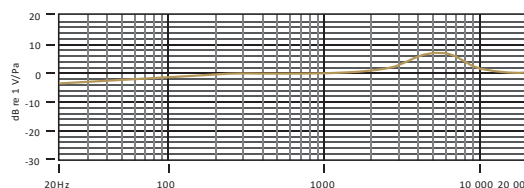

Notes

*Microphone must be registered at www.rodemic.com to activate extended warranty.

RØDE
MICROPHONES

Features 特点

- Pop shield, Tripod desk stand, ring mount, storage pouch and 6m (20') USB cable included.
- 3.5mm stereo headphone jack for zero-latency monitoring
- Direct mix control between mic input and source output
- Compatible with Apple iPad
- Cardioid polar pattern
- Compatible with the SMR shockmount & WS2 foam windshield
- Free two year extended warranty*

-包括防风罩、桌面三脚架、环形支架、存储袋和6米（20'）USB电缆。

-3.5毫米立体声耳机插孔用于零延迟监听

-麦克风输入和信号源输出之间的直接混合控制

-与苹果iPad兼容

-心形极性模式

-与SMR减震器和WS2泡沫防风罩兼容

Note 请关注

于www.rodemic.com/warranty在线注册后免费延长至2年保修期

Specifications 规格

Acoustic Principle 声学原理	Pressure Gradient 压力梯度
Active Electronics 有源电子器件	JFET impedance converter with bipolar output buffer, A/D converter 16bit 48kHz, headphone amplifier 带双极输出缓冲器的JFET阻抗转换器，16位48kHz的 A/D 转换器，耳机扩音器
Directional 指向性	Pattern Cardio 心形拾音模式
Frequency Range 频率范围	20Hz ~ 20kHz
Dynamic Range 动态范围	96dB
Maximum SPL 最大声压级	110 dB SPL
Power Requirements 功率要求	USB 5v DC
Output Connection 输出连接	USB 5v DC
Net Weight 净重	520g