

NT55

Compact 1/2" Cardioid Condenser Microphone

AUSTRALIA
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 91028, Long Beach CA 90809-1028
Ph: +1 562 364 7400 Fax: +1 888 412 4664




Features

- Externally biased condenser
- Gold sputtered 1/2" capsule
- Three position PAD - 0dB, -10dB and -20dB
- Three position High-Pass Filter - flat, 75Hz and 150Hz
- Cardioid or Omni polar pattern using interchangeable capsules
- Heavy-duty satin-nickel plated body
- Surface mount circuitry
- Low noise
- Available as Certified Matched Pair
- Designed and manufactured in Australia
- Full 10 year warranty with online registration


Specifications

Acoustic Principle	Pressure gradient
Directional Pattern	Cardioid and Omni
Frequency Range	20 Hz-20 kHz (with selectable HPF)
Sensitivity	-38 dB re 1 Volt/Pascal (12 mV @ 94 dB SPL) +/- 2 dB @ 1kHz
Output Impedance	100Ω
Dimensions	Length - 145mm (5.7086") Diameter - 20mm (0.7874")
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)
Shipping Weight	Single - 450g Matched Pair - 1.5kg
Net Weight	110g


Polar Pattern





Cardioid capsule



Omni capsule

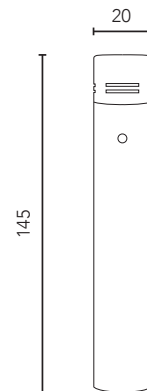

Frequency Response

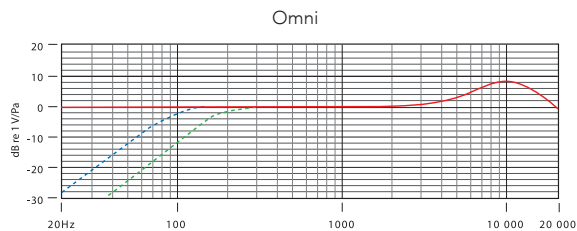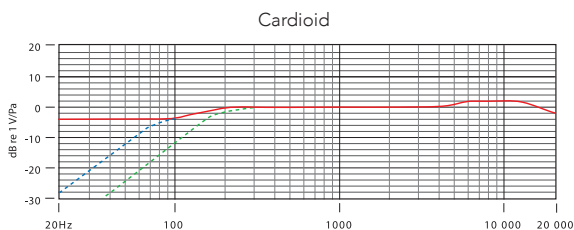

Incl. Accessories

- RM5
- NT45-O omni capsule head
- Custom case



RØDE
MICROPHONES

