

LAVALIER II™

PREMIUM LAVALIER MICROPHONE



3.5MM TRS CONNECTION



PROFESSIONAL QUALITY



The Lavalier II is a premium lavalier microphone that is ideal for the most demanding audio and video applications. It features a unique low-profile design with a flat capsule that is incredibly discreet. The included mounting clip is also extremely compact, making the Lavalier II much easier to conceal than standard lavaliers. It has a very flat frequency response that flatters all voice types, with an omnidirectional polar pattern that picks up crystal-clear, detailed audio from all directions. The Lavalier II also comes with a premium accessory kit featuring a high-quality pop filter and mini furry windshield, coloured identification rings, and a handy zip case.

- Premium lavalier microphone with unique low-profile design
- Compact mounting clip
- Omnidirectional polar pattern
- Delivers broadcast-grade audio with flat frequency response
- 3.5mm TRS locking connector
- Includes pop filter, mini furry windshield, mic clip, set of coloured ID rings and zip case



ACOUSTIC & ELECTRICAL SPECIFICATIONS

Acoustic Principle:	Permanently polarised
Active Electronics:	JFET impedance converter
Capsule:	6mm
Polar Pattern:	Omnidirectional
Frequency Range:	20Hz – 20KHz
Output Impedance:	2K2Ω
Signal to Noise Ratio:	66 dB
Equivalent Noise (A-weighted)	28dBA Typical
Maximum SPL:	106 dB SPL RMS (Plug-In Power, 1% THD) 120 dB SPL RMS (Plug-In Power, 10% THD)
Maximum Output Level:	44mV (@ 1kHz, 1% THD into 1KΩ load)
Sensitivity:	-37 dB re 1 Volt/Pascal (12.59 mV @ 94 dB SPL) +/- 3 dB @ 1kHz
Dynamic Range:	78 dB Typical
Power Requirements:	1.8v to 5v Plugin Power


MECHANICAL SPECIFICATIONS

Weight (grams):	Body: 9 Clip: 2
Dimensions (millimetres):	Body: L 1200, W 10, H 5 Clip: L 21, W 20, H 8
Compatible RØDE Products:	<ul style="list-style-type: none"> • Wireless GO • Wireless GO II • AI-Micro • RØDELink Series
Included Accessories:	<ul style="list-style-type: none"> 1 x Lavalier II 1 x Pop Filter 1 x Mic Clip 1 x Mini Furry Windshield 1 x Set of Coloured ID Rings 1 x Zip Case


MIC




TRS CONNECTOR

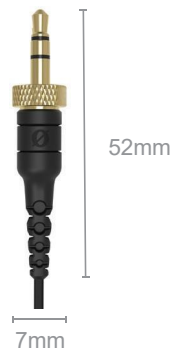

POLAR PATTERN



FREQUENCY RESPONSE

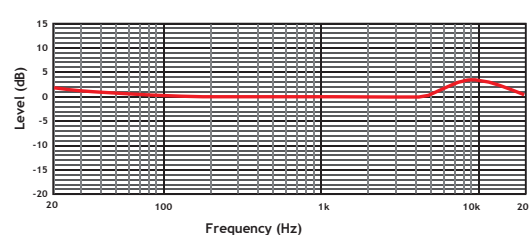

(中音翻译)

The Lavalier II is a premium lavalier microphone that is ideal for the most demanding audio and video applications. It features a unique low-profile design with a flat capsule that is incredibly discreet. The included mounting clip is also extremely compact, making the Lavalier II much easier to conceal than standard lavaliers. It has a very flat frequency response that flatters all voice types, with an omnidirectional polar pattern that picks up crystal-clear, detailed audio from all directions.. The Lavalier II also comes with a premium accessory kit featuring a high-quality pop filter and mini furry windshield, coloured identification rings, and a handy zip case.

- Premium lavalier microphone with unique low-profile design
- Compact mounting clip
- Omnidirectional polar pattern
- Delivers broadcast-grade audio with flat frequency response
- 3.5mm TRS locking connector
- Includes pop filter, mini furry windshield, mic clip, set of coloured ID rings and zip case

Lavalier II 是一款优质领夹式话筒，是为高标准需求的音频和视频应用提供的理想选择。它具有独特的设计，其平滑的极头技术令人难以置信地精细。附带的安装夹也非常紧凑，使 Lavalier II 比标准领夹更容易隐蔽。它有一个非常平顺的频率响应，适合所有的声音类型，全向的极性模式可以从各个方向采集到如水晶般清澈、细致的音频。Lavalier II 还配备了一个高级配件包，包括一个高质量的滤波器和迷你毛茸的防风罩、彩色识别环和一个方便的拉链包。

- 优质领夹式话筒，具有独特的低调设计
- 紧凑的安装夹
- 全向性的极性模式
- 提供具有平顺频率响应的广播级音质
- 3.5毫米TRS锁定连接器
- 包括滤波器、迷你毛绒防风罩、话筒夹、一套彩色ID环和拉链包

COUSTIC & ELECTRICAL SPECIFICATIONS 耦合和技术数据

Acoustic Principle 声学原理:	Permanently polarised 永久性极化
Active Electronics 有源电子器件:	JFET impedance converter JFET阻抗转换器
Capsule 极头:	6mm 毫米
Polar Pattern 极性模式:	Omnidirectional 全向性
Frequency Range 频率范围:	20Hz – 20KHz
Output Impedance 输出阻抗:	2K Ω
Signal to Noise Ratio 信噪比:	66 dB

Equivalent Noise 等效噪音

28dBA Typical 标准的

(A-weighted) (A-加权)

Maximum SPL 最大声压级:

-106 dB SPL RMS (Plug-In Power 插入式电源, 1% THD)

-120 dB SPL RMS (Plug-In Power 插入式电源, 10% THD)

Maximum Output Level 最大输出电平: 44mV (@ 1kHz, 1% THD into 1K Ω load)

Sensitivity 灵敏度: -37 dB re 1 Volt/Pascal (12.59 mV @ 94 dB SPL) +/- 3 dB @ 1kHz

Dynamic Range 动态范围: 78 dB Typical 标准值

Power Requirements 电源要求: 1.8v to 5v Plugin Power 插入式电源

MECHANICAL SPECIFICATIONS 机械规格

Weight (grams) 重量 (克) :

-Body 主体: 9

-Clip 夹子: 2

Dimensions (millimetres) 尺寸 (毫米) :

-Body 主体: L 1200, W 10, H 5

-Clip 夹子: L 21, W 20, H 8

Compatible RØDE Products 可兼容产品:

- Wireless GO
- Wireless GO II
- AI-Micro
- RØDELink Series

Included Accessories 配套配件:

1 x Lavalier II

1 x Pop Filter

1 x Mic Clip

1 x Mini Furry Windshield

1 x Set of Coloured ID Rings

1 x Zip Case.