


# NTG-2

Directional Condenser Microphone

**AUSTRALIA**  
107 Carnarvon st, Silverwater NSW 2128 Australia  
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

**USA**  
PO Box 91028, Long Beach CA 90809-1028  
Ph: +1 562 364 7400 Fax: +1 888 412 4664

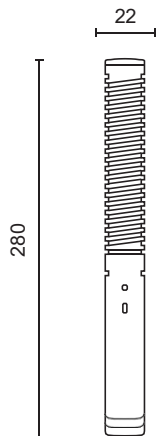

## Incl. Accessories

- WSVM wind shield
- ZP2 zip pouch
- RM5 micclip


## Features

- Broadcast sound quality
- Low noise circuitry
- Condenser transducer
- Rugged metal construction
- Two step High Pass Filter (Flat/80Hz)
- P48 phantom power or 1.5V AA battery option
- Low handling noise
- Low weight - 161g (5.17 oz.)
- Designed and manufactured in Australia
- Full 10 year warranty with online registration


## Specifications

Acoustic Principle	Line Gradient
Directional Pattern	Super-Cardioid
Frequency Range	20Hz ~ 20,000Hz (selectable HPF@80Hz)
Sensitivity	-36dB $\pm$ 2dB re 1V/Pa @ 1kHz
Nominal Impedance	250 $\Omega$ - phantom power 350 $\Omega$ - battery power
Equivalent Noise	18dBA SPL (A - weighted per IEC651)
Maximum Output	+6.9dBu (@ 1% THD into 1k $\Omega$ )
Dynamic Range	113dB (per IEC651)
Maximum SPL	131dB(@ 1kHz, 1% THD into 1k $\Omega$ load)
Signal/Noise	76dB SPL (A - weighted per IEC651)
Power Req.	48V Phantom Power or 1.5 AA battery
Dimensions	Length - 280mm Diameter - 22mm
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)
Net Weight	161g

## Polar Pattern



## Frequency Response

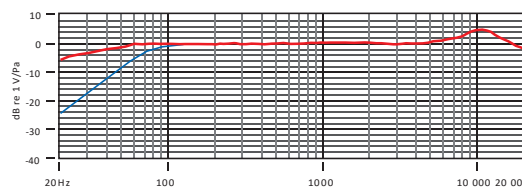

**RØDE**  
MICROPHONES

## Features 特点

Broadcast sound quality 广播级音质

Low noise circuitry 低噪音电路

Condenser transducer 电容传感器

Rugged metal construction 坚固的金属结构

Two step High Pass Filter (Flat/80Hz) 两级高通滤波器 (平坦/80Hz)

P48 phantom power or 1.5V AA battery option **P48**幻象电源或**1.5V AA**电池选项

Low handling noise 低处理噪音

Low weight - 161g (5.17 oz.) 重量低 - **161克 (5.17盎司)**

Designed and manufactured in Australia 在澳大利亚设计和制造

Full 10 year warranty with online registration 于 [www.rodemic.com/warranty](http://www.rodemic.com/warranty) 在线注册后免费延长至 **10** 年保修期

## Specifications 规格

Acoustic Principle 声学原理	Line Gradient 线条渐变
Directional Pattern 指向性模式	Super-Cardio 超级心形
Frequency Range 频率范围	20Hz ~ 20,000Hz (select able HPF@80Hz)
Sensitivity 敏感度	-36dB ±2dB re 1V/Pa @ 1kHz
Nominal Impedance 额定阻抗	250Ω - phantom power 幻象电源 350Ω - battery power 电池供电
Equivalent Noise 等效噪音	18dBA SPL (A - weighted per IEC651)
Maximum Output 最大输出	+6.9dBu (@ 1% THD into 1kΩ)
Dynamic Range 动态范围	113dB (per IEC651)
Maximum SPL 最大声压级	131dB (@ 1kHz, 1% THD into 1kΩ load)
Signal/Noise 信号/噪声	76dB SPL (A - weighted per IEC651)
Power Req. 功率要求	48V Phantom Power or 1.5 AA battery AA级电池
Dimensions 尺寸 (毫米)	Length 长度 - 280mm Diameter 直径- 22mm
Output Connection 输出连接	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)
Net Weight 净重 (克)	161g