

VIDEOMIC GO II™

LIGHTWEIGHT DIRECTIONAL MICROPHONE



HIGHLY DIRECTIONAL



3.5MM TRS OUTPUT



DIGITAL USB OUTPUT




iPhone & Android COMPATIBLE




The VideoMic GO II is a versatile and lightweight shotgun microphone that excels in a range of recording applications. It features a 3.5mm TRS output for use with a camera, plus a digital USB output for recording with mobile devices and computers*. It delivers crisp, clear, directional sound, making it ideal for filmmaking and vlogging, and is also fully compatible with the RØDE Connect podcasting and streaming software for Mac and PC. When used in USB mode, the 3.5mm output doubles as a headphone output for easy monitoring and playback.

- Lightweight shotgun microphone
- 3.5mm TRS output for use with cameras
- Digital USB output for use with mobile devices and computers*
- Compatible with RØDE Connect software

VideoMic GO II (microphone only)

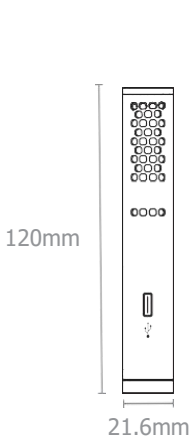

VideoMic GO II with SM8-R and foam windshield

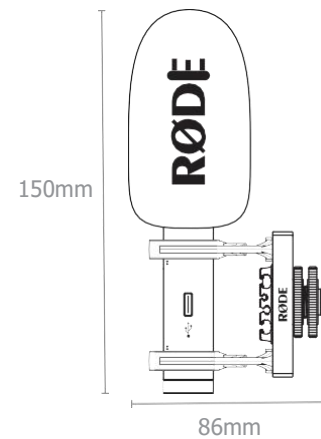

ACOUSTIC & ELECTRICAL SPECIFICATIONS

| | |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Acoustic Principle: | Pressure gradient electret condenser |
| Polar Pattern: | Supercardioid |
| Frequency Response: | 20Hz - 20kHz |
| Output Impedance: | 2K2Ω |
| Signal to Noise Ratio: | 79 dBA |
| Equivalent Noise (A-weighted): | 15 dBA |
| Dynamic Range: | 95 dBA Typical |
| Sensitivity: | -31dBV(28.78mV @ 94dB SPL) ± 1dB @ 1kHz |
| Max Input SPL: | 110 dB SPL |
| Output Connections: | <ul style="list-style-type: none"> • 3.5mm TRS • USB-C |
| Computer Connectivity: | USB-C (USB 2.0) |
| Simultaneous I/O: | Stereo input and output when in USB mode |
| Power Requirements: | <ul style="list-style-type: none"> • 3.5mm plug-in power 2 - 5V • USB 5V |
| Bit Depth: | 24-bit |
| Sample Rates: | 48 kHz |
| Minimum OS Requirement: | <ul style="list-style-type: none"> • macOS 10.15 • Windows 10 (20H2) • iOS 14 • Android 9.0 |

MECHANICAL SPECIFICATIONS


| | |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Weight (grams): | VideoMic GO II: 33 VideoMic GO II and included accessories: 96 |
| Dimensions (millimetres): | VideoMic GO II: Height: 120 Diameter: 21.6 VideoMic GO II and included accessories: Length: 150 Width: 70 Height: 86 |

| | |
|------------------------------|------------------------------------------------------------------------------------|
| Compatible RØDE Accessories: | WS12, SC14, SC15, SC16, SC17, SC18, SC19, SC20, SC21, SC22, SC23, SC24, SC25, SC26 |
|------------------------------|------------------------------------------------------------------------------------|


| | |
|---------------------------|-------------------------------------------------------------------------------------------------------------------|
| Compatible RØDE Software: | <ul style="list-style-type: none"> • RØDE Connect • RØDE Central • RØDE Reporter |
|---------------------------|-------------------------------------------------------------------------------------------------------------------|

| | |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Included Accessories: | <ul style="list-style-type: none"> • 1 x SC14 TRS-TRS cable • 1 x foam windshield • 1 x SM8-R shockmount |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------|

POLAR PATTERN



FREQUENCY RESPONSE

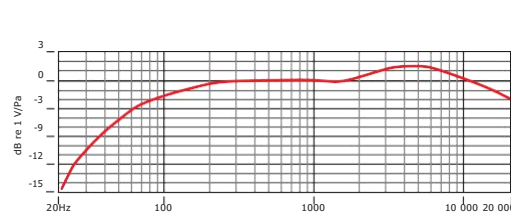

The VideoMic GO II is a versatile and lightweight shotgun microphone that excels in a range of recording applications. It features a 3.5mm TRS output for use with a camera, plus a digital USB output for recording with mobile devices and computers*. It delivers crisp, clear, directional sound, making it ideal for filmmaking and vlogging, and is also fully compatible with the RØDE Connect podcasting and streaming software for Mac and PC. When used in USB mode, the 3.5mm output doubles as a headphone output for easy monitoring and playback.

VideoMic GO II 是在一系列录音应用中，一款多功能、轻量级的，表现出色的枪形话筒。它有一个3.5毫米 TRS 输出，可用于相机，还有一个数字 USB 输出，可用于移动设备和电脑的录音。它提供清脆、清晰、有方向性的声音，使其成为电影制作和视频博客的理想选择，并且与 Mac 和 PC 的 RØDE Connect 播客和流媒体软件完全兼容。在 USB 模式下使用时，3.5 毫米输出可作为耳机输出，便于监测和播放。

- Lightweight shotgun microphone
 - 3.5mm TRS output for use with cameras
 - Digital USB output for use with mobile devices and computers*
 - Compatible with RØDE Connect software
- 轻巧的枪型话筒
 - 3.5毫米TRS输出，可与相机一起使用
 - 数字USB输出，用于移动设备和电脑。
 - 与 RØDE Connect 软件兼容

ACOUSTIC & ELECTRICAL SPECIFICATIONS 声学 and 电气技术规格

| | |
|-------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| Acoustic Principle 声学原理： electret condenser 驻极体电容器 | Pressure gradient 压力梯度 |
| Polar Pattern 极性模式。： | Supercardioid 超心音 |
| Frequency Response 频率 响应： | 20Hz - 20kHz |
| Output Impedance 输出阻 抗： | 2K2Ω |
| Signal to Noise Ratio 信号 噪声比： | 79 dBA |
| Equivalent Noise (A-weighted)等效噪声（A型加权）： | 15 dBA |
| Dynamic Range 动态范围： | 95 dBA Typical |
| Sensitivity 灵敏度： | -31dBV(28.78mV @ 94dB SPL) ± 1dB @ 1kHz |
| Max Input SPL 最大输入声 压级： | 110 dB SPL |
| Output Connections 输出 连接： | <ul style="list-style-type: none"> • 3.5mm TRS • USB-C |
| Computer Connectivity 计算机连接： | USB-C (USB 2.0) |
| Simultaneous I/O 同时进行 I/O： | Stereo input and output when in USB mode |
| Power Requirements 电源 要求： | <ul style="list-style-type: none"> • 3.5mm plug-in power 2 - 5V • USB 5V |
| Bit Depth 位元深度： | 24-bit |
| Sample Rates 采样率： | 48 kHz |
| Minimum OS 最低操作系 统 | <ul style="list-style-type: none"> • macOS 10.15 |

- Requirement 要求:
- Windows 10 (20H2)
 - iOS 14
 - Android 9.0

MECHANICAL SPECIFICATIONS 机械技术规格

Weight 重量 (grams 克): VideoMic GO II: 33
VideoMic GO II and included accessories: 96

Dimensions 尺寸: VideoMic GO II:
(millimetres 毫米) Height 高: 120
Diameter 直径: 21.6
VideoMic GO II and included accessories :
Length 长度: 150
Width 宽度: 70
Height 高度: 86

Compatible RØDE WS12, SC14, SC15, SC16,
Accessories RODE 兼容配件: SC17, SC18, SC19, SC20,
SC21, SC22, SC23, SC24,
SC25, SC26

Compatible RØDE Software RODE 兼容软件:
• RØDE Connect
• RØDE Central
• RØDE Reporter

Included Accessories 配件包括:
• 1 x SC14 TRS-TRS cable 电缆
• 1 x foam windshield 泡沫防风罩
• 1 x SM8-R shockmount 减震器