




PX-1

Large Diaphragm Cardioid Condenser Microphone
大震膜心形指向电容话筒

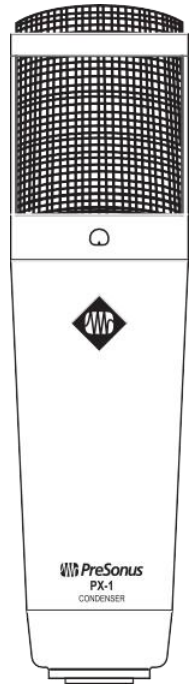

Key Features

主要特点

- True large-diaphragm condenser microphone
 - Cardioid polar pattern
 - Great choice for recording vocals, guitar, podcasts, and more
 - Side address
 - 1-inch (25 mm), gold-sputtered capsule
 - Exceptional clarity throughout its frequency response range
 - Rugged construction
 - Top-quality performance specifications
 - Hard mount and carrying case included
- 真正的大振膜电容式话筒
 - 心形极性模式
 - 用于录制人声、吉他、播客等的最佳选择
 - 侧面处理
 - 1英寸（25毫米），金溅射胶囊
 - 在整个频率响应范围内具有卓越的清晰度
 - 坚固的结构
 - 最高质量的性能规格
 - 包括硬座和手提箱

Capture every detail, every time
捕捉每一次每一个细节


Designed for musicians and performers who demand outstanding audio quality, the PreSonus PX-1 cardioid condenser microphone is an ideal solution for recording vocals, guitar, podcasts, and much more. A true large-diaphragm condenser microphone, the PX-1 features a 25mm, gold-sputtered capsule designed to provide exceptional clarity throughout its frequency response range. Rugged construction and top-quality performance specifications make the PX-1 large diaphragm microphone an excellent addition for any home recording or streaming studio.

PreSonus PX-1 心形电容麦克风专为对音频质量有要求的音乐家和表演者而设计的，是录制人声、吉他、播客等的理想解决方案。作为真正的大振膜电容式麦克风，PX-1 拥有一个25毫米的金溅射麦克风头，旨在整个频率响应范围，可提供卓越的清晰度。坚固的结构和顶级的性能规格，优秀的PX-1大振膜麦克风，成为任何家庭录音或流媒体工作室的不错选择。

Technical specifications 技术规格

Capsule Type	25mm, gold sputtered 6 micron Mylar, large-diaphragm condenser
Preamp Type	Class A FET
Sensitivity	25 mV/Pa
Frequency Response	20 Hz to 18 kHz
Polar Pattern	Cardioid
Equivalent Noise Level	18 dB SPL A-wtd
Maximum SPL	135 dB
Total Load Impedance	>1 kΩ
Output Impedance	200Ω
Powered By	48V Phantom Power

Frequency response 频率响应

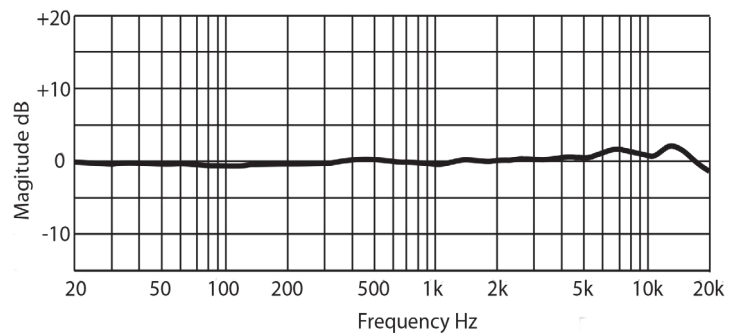

Polar pattern 极性模式

