


# M7

Cardioid Condenser Microphone 心形电容式麦克风



## Key Features 主要特点

- Versatile entry-level solution for recording vocals, guitar, and podcasts on a budget
- Back electret condenser microphone
- Cardioid polar pattern
- 134dB of SPL handling allows for use with loud sound sources
- Rugged construction
- Hard stand mount, 10' XLR cable, and carry case included
- 多功能的入门级解决方案——用于录制人声、吉他和播客的最佳性价比解决方案
- 背面的驻极体电容麦克风
- 心形极性模式
- 可处理134dB的声压级，可用于大的声源
- 坚固的结构
- 包括硬座支架、10'XLR电缆和手提箱

## The most mic for the least money 不可多得的麦克风


Designed for musicians and performers who need great audio quality on a budget, the M7 is an ideal all-around recording solution for entry-level podcasters, singers, and musicians. The M7 boasts a warm frequency response that flatters the human voice. And thanks to the M7's cardioid polar pattern, the M7 will brilliantly record the sounds you point it at, while downplaying the sounds you don't. Last but not least, the M7 can rock hard when asked—its 134 dB of SPL handling lets it wrangle loud instruments like cracking snare drums or electric guitar amps worry-free—something more expensive mics can't always do.

M7 是为那些需要良好音频质量的音乐家和表演者而设计的，是入门级播客、歌手和音乐家的理想全能录音解决方案。M7 拥有一个温暖的频率响应，可以美化人的声音。由于 M7 的心形极性模式，M7 非常出色地记录你所指向的声音，同时，淡化你所不指向的声音。值得一提的是，M7 可以用来摇滚——其 134 dB 的声压级处理能力使其可以处理大音量的乐器，如爆破般的小鼓声或电吉他放大器，这些是更昂贵的麦克风所不能做到的。


## Technical specifications 技术规格

Element 元件	Black Electret Condenser
Polar Pattern 极性模式	Uni-directional
Sensitivity 灵敏度	-38 dB ± 3 dB (0 dB=1V/)
Frequency Response 频率响应	30 Hz to 18 kHz
Output Impedance 输出阻抗	150 Ω ± 30% (at 1kHz)
Equivalent Noise Level 等效噪音水平	19 dB SPL A-wtd
Maximum SPL 最大声压级	134 dB (at 1kHz = 1% THD)
S/N Ratio 信噪比	75 dB
Working Voltage 工作电压	48 V phantom

## Frequency response 频率响应

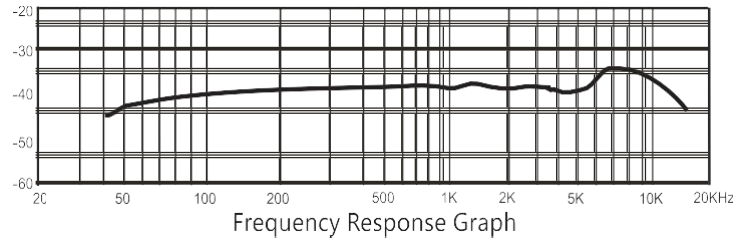

## Polar pattern 极性模式

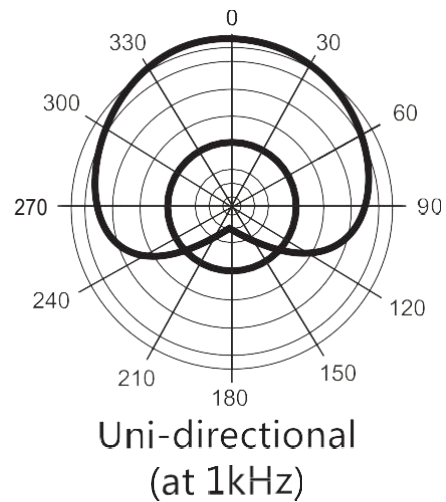

Uni-directional (at 1kHz)